COMMERCIAL BROCHURE



NX SUITE

WELCOME



TOTO CLEANOVATION

Clean gives peace of mind Clean makes life beautiful Clean feels refreabing Clean is caung for people and the plan Clean brings welfness to everyday life

TOTO innovation brings a new world of clean to life.

VISIT TOTO'S FIRST-EVER

VIRTUAL SHOWROOM



VIRTUALSHOWROOM.TOTOUSA.COM

TOUR OUR VIRTUAL SHOWROOM

TOTO's experiential virtual showroom is filled with rich informational videos, dynamic booth sections, and 360-degree product demonstrations.





TOTO CLEANOVATION

Clean gives peace of mind Clean makes life beautiful Clean feels refreshing Clean is caring for people and the planet Clean brings wellness to everyday life

TOTO innovation brings a new world of clean to life, enriching every moment of every day.



ICONS

Icon Guide

TOILETS & URINALS

- 1G® Toilet Innovation and Technology Highlights
- 09 Urinals and Flush Valves Technology Highlights
- 10 **Toilets Comparison Chart**
- 11 1G Toilets
- 13 1.28 GPF Toilets
- 15 Flushometer HET
- 16 Toilet Seats
- 16 Urinal Flush Valve Compatibility Chart
- Washout Ultra HEU 17
- Washout HEU

RECLAIMED WATER PRODUCTS

- 19 Reclaimed Water Innovation and Technology
- 20 Reclaimed Water Flushometer Toilets
- 21 ECOPOWER® HET Flush Valve
- Reclaimed Water HEU 22
- 23 ECOPOWER Ultra HET Flush Valve
- **ECOPOWER Urinal Flush Valve**

TOUCHLESS RESTROOMS

Clean and comfortable experience

FLUSH VALVES

- 28 **ECOPOWER Flush Valves**
- 31 **ECOPOWER Urinal Flush Valves**
- Manual Flush Valve

FAUCETS

- 32 **ECOPOWER Faucets Innovation & Technology**
- 34 **ECOPOWER Faucet Identification Chart**
- 36
- 36
- 37
- GM 37
- 37
- Gooseneck
- 38 Helix®
- Libella® 38
- 39 Standard R
- 39 Standard S
- Touchless Faucet Controller with Heater

SOAP DISPENSERS

- Sensor Operated Soap Dispensers
- TOTO Soap

LAVATORIES

- Innovation & Technology Highlights
- Arvina® Vessel
- Undercounter
- Rendezvous
- Dantesca
- Atherton™
- Undercounter Wheelchair User's Lavatories

CLEAN DRY® HAND DRYERS

- Innovation & Technology Highlights
- Hand Dryers Overview

IOT SMART RESTROOM

- 52 KOLO™ Smart Monitoring System
- ECOPOWER Flush Valves Innovation and Technology
- **ECOPOWER Flush Valves Compatibility Chart**
- **ECOPOWER Faucets Innovation and Technology**

ICON GUIDE

TOILET & LAVATORY



1.0 GPF



TORNADO FLUSH



E-MAX®



CEFIONTECT®



UNIVERSAL HEIGHT



SKIRTED DESIGN



WATER SAVING

wasн∟ė́т。+

EFV & AUTO FAUCET



ECOPOWER®



AUTO FLUSH



SAFETY THERMO®



SOFTFLOW

CODES & STANDARDS



ADA



WATERSENSE



CEC



GREEN SEAL™

CALGreen

AWARDS



REDDOT DESIGN AWARD



IF DESIGN AWARD



GREEN GOOD DESIGN AWARD

Using only 1 gallon per flush, 1G toilets provide the most efficient flush in the industry.

A state-of-the-art, hole-free rim design that offers dual-nozzle bowl cleansing, creating a centrifugal rinsing action that cleans the bowl more efficiently.

High performance, high-efficiency flushing technology using only 1.28 GPF with a 3" wide flush valve, large trapway, and extra-large siphon jet.

Ultra-smooth ceramic glaze leaves nowhere for waste to cling.

Toilet height that allows for a more comfortable height position across a widerange of users.

The trapway is concealed by smooth porcelain, making the toilet easier to clean.

Water efficient toilets designed with 1.28 gallons per flush or less.

WASHLET and toilet set with a concealed connection that is specially designed for a seamless installation.

EcoPower indicates sensor faucets and flush valves that are powered by flowing water.

No need to touch buttons or handles and never worry about someone forgetting to flush — it's automatic after each use.

Shape Memory Alloy (SMA) thermostatic valve that prevents a sudden, unwanted increase in water temperature.

This advanced water technology precisely balances individual streams of water to gently caress the skin with virtually no splash. The beautiful translucent water streams are soft, luxurious, and visually pleasing.

Product complies with Americans with Disabilities Act guidelines.

Product that meets EPA standards for water efficiency and performance criteria.

Product meets California Energy Commission requirements.

Product meets Green Seal certification requirements

Product meets CalGreen Water Regulations for new construction and permitted remodel.

An internationally renowned design award since 1955. Held at Design Zentrum Nordrhein Westfalen in Essen, Germany. Products that have been strictly examined and recognized by design experts against standards of innovativeness, functionality, quality, and so forth.

An internationally renowned design award since 1953. It is held at iF International Forum design GmbH in Hannover, Germany. Products whose aesthetics, functionality, and innovativeness have been strictly examined and recognized by design experts.

Hosted by the Chicago Athenaeum Museum of Architecture and Design and the European Centre for Architecture Art Design and Urban Studies in Ireland. A global environmental award that began in 2009 with the aim of reforming awareness through sustainable design.

1000

TOTO EVERYWHERE



TOTO products can create beautiful, refreshing bathroom experiences in any situation. We design everything from urinals to hand dryers, so even a football stadium or an airport restroom can be a peaceful, inspiring escape.

We're known for consistent highperformance design and a beautiful, global aesthetic in all our products, so wherever you find TOTO you can experience the same reliability, value and style.



In today's fast-paced world, the need for superior performance and reliability means everything. And when it comes to busy commercial buildings, TOTO products are the only choice. We design world-class, eco-friendly plumbing products that help you save water and money without sacrificing an ounce of performance.

COMPLIANCE

TOTO offers a full range of bathroom products that can help professionals in the commercial industry earn LEED points toward certification.

LEED is an internationally recognized green building certification system that provides third-party verification for a building or community. To get maximum LEED points, a new or existing building must reach specified water-usage reduction percentages. The more usage reductions, the more LEED points are earned.



THE AMERICANS WITH DISABILITIES ACT

The Americans with Disabilities Act (ADA) was enacted in 1990 to establish design codes to serve people of all ages and abilities. A core principle behind TOTO Total Design, ADA standards consider the needs of everyone without additional adaptation or specialization, optimizing the bathroom experience for all generations in the family home.

By innovating ergonomics and accessibility, and combining them with our global design aesthetic, we give everyone everything that's great about TOTO.

ENVIRONMENTAL RESPONSIBILITY

TOTO plays a significant role in leading the sustainability charge in our industry. In fact, our active role in leading policy and certification organizations demonstrates how we go beyond products or practices to help ensure environmental responsibility across all company activities.

- TOTO is the only plumbing manufacturer to receive the EPA's Water Efficiency Leader Award
- TOTO was the first plumbing products manufacturer to have employees become substainability experts by gaining LEED Accredited Professional status
- TOTO was the first major plumbing products manufacturer to join the United States Green Building Council (USGBC)
- TOTO was the first plumbing products manufacturer to develop third-party verified LCA Transparency Reports for bath products.







United States Green Building Council



Water Efficiency Leader Award



Environmental Protection Agency



LEED AP



Argon Award



Meets California Water Savings Regulations



1G® TOILETS

TOTO's 1G toilets are a perfect solution to help owners and managers of hospitality The powerful, yet quiet 1G system offers a 35 percent savings over 1.6 GPF toilets —a substantial savings without wavering on our renowned performance.

35%
WATER
SAVINGS

Reduces water use by 35% or more on average over a standard 1.6 GPF toilet

TOTO 1G TOILETS



5,840 GALLONS Used in Flushing

\$175 Operation Cost

PER YEAR

STANDARD 1.6 GPF TOILETS



9,344 GALLONS Úsed in Flushing

\$280 Operation Cost

PER YEAR

*The average American flushes five times a day at home. Assuming an average household of 3.2 people over 365 days @ 3¢ per gallon.

COMMERCIAL TOILETS, URINALS & FLUSH VALVES

Innovation & Technology Highlights

THE TOTO **ADVANTAGE**

- Thorough and extensive testing to ensure balanced flushing
- HETs use 1.28 GPF
- HEUs use as little as 0.125 GPF
- TOTO toilet and urinal fixtures are designed for efficient operation, ensuring the highest performance with the lowest consumption levels.



EFVs use the flow of the water to power the entire system.

and when paired with a TOTO high-efficiency commercial toilet or urinal...

equals a balanced system that cannot be matched by combining different toilets and flush valves.



CEFIONTECT®

- Extraordinarily smooth glaze prevents particulates from adhering to ceramic surfaces
- CEFIONTECT keeps surfaces cleaner, longer
- Less cleaning means less water use and fewer chemicals in the environment










ECOPOWER® FLUSH VALVES

- Hydroelectric turbine uses water to create power
- ECOPOWER flush valves provide maximum performance in high-traffic commercial spaces
- · Self-powering eliminates costs of installing electrical supplies and wiring
- No routine battery replacement means less maintenance costs



TOILETS **COMPARISON CHART**

		SKU#		MIN.	**			SEAT F	RECOM. FLU	FLUSH		GP	F							
	KIT	BOWL	TANK	ROUGH- IN	ELON.	ROUN.	SD	HEIGHT		SYSTEM	1G (3.8L)	1.28 (4.8L)	1.6 (6L)	DUAL		w	6	(4)	OTHER**	+
CARLYLE II 1G	MS614124CUFG	N/A	N/A	12" (10"-14")	•		•	UNIVERSAL	SS124 included	1	•				•	•	•	•	R	•
ULTRAMAX II 1G	MS604124CUFG	N/A	N/A	12"	•			UNIVERSAL	SS124 included	10 🗑	•				•	•	•	•	R	•
VESPIN II 1G	CST474CUF(G)	CT474CUF(G)	ST453U	12" (10"-14")	•		•	UNIVERSAL	SS114	10 🗑	•				•*	•	•	•	R	•
DRAKE II 1G	CST454CUF(G)	C454CUF(G)	ST453U	12"	•			UNIVERSAL	SS114	10 🗑	•				•*	•	•	•	R	•
DRAKETING	CST453CUF(G)	C453CUF(G)	ST453U	12"		•		UNIVERSAL	SS113	10 🗑	•				•*	•	•	•	R	
DRAKE II	CST454CEF(G)	C454CUF(G)	ST454E	12"	•			UNIVERSAL	SS114	8		•			•*	•	•	•	R	•
DRAKEII	CST453CEF(G)	C453CUF(G)	ST454E	12"		•		UNIVERSAL	SS113	8		•			•*	•	•	•	R	
	CST776CEF(G)	C776CEF(G)	ST776EA	12"	•			UNIVERSAL	SS114	8		•			•	•	•	•	R,B,D,DB	•
	CST776CSF(G)	C776CEF(G)	ST776SA	12"	•			UNIVERSAL	SS114	8			•		•	•	•		 R R R R R R R R R 	•
	CST776CE(G)	C776CE(G)	ST776EA	12"	•			REGULAR	SS114	8		•			•			•		•
DRAKE	CST776CS(G)	C776CE(G)	ST776SA	12"	•			REGULAR	SS114	8			•		•					•
DIVARL	CST776CEFG.10	C776CEFG.10	ST776EA	10"	•			UNIVERSAL	SS114	8		•			•	•	•	•	R,B,D,DB	•
	CST776CSFG.10	C776CEFG.10	ST776SA	10"	•			UNIVERSAL	SS114	8			•		•	•	•			•
	CST775CEF(G)	C775CEF(G)	ST776EA	12"		•		UNIVERSAL	SS113	8		•			•	•	•	•	R,B,D,DB	
	CST775CSF(G)	C775CEF(G)	ST776SA	12"		•		UNIVERSAL	SS113	8			•		•	•	•			
	CST786CEMF(G)	C776CEF(G)	ST786EA	12"	•			UNIVERSAL	SS114	8		•			•	•	•	•		•
DRAKE	CST786CEM(G)	C776CE(G)	ST786EA	12"	•			REGULAR	SS114	8		•			•			•		•
TRANSITIONAL	CST786CEMFG.10	C776CEFG.10	ST786EA	10"	•			UNIVERSAL	SS114	8		•			•	•	•	•		•
	CST785CEF(G)	C775CEF(G)	ST786EA	12"		•		UNIVERSAL	SS113	8		•			•			•		
ENTRADA	CST244EF	C244EF	ST243E	12"	•			UNIVERSAL	SS114	6		•				•	•	 R R,B,D,DB R		
ENTRADA	CST243EF	C243EF	ST243E	12"		•		UNIVERSAL	SS113	3		•				•		•	R	

*#51: Without CEFIONTECT

**R: Right Hand Trip Lever available

**B: Bolt Down Lid available

**D: Insulated Tank available

**DB: Insulated Tank and Bolt Down Lid available

**RB: Right Hand Trip Lever and Bolt Down Lid available

TOILET FLUSH VALVE COMPATIBILITY CHART				FLUSHOMETER							
					ECOPOWER®	MANUAL					
	PRODUCT	SKU#	TYPE	1.0 GPF	1.28 GPF	1.6 GPF	1.28 GPF	1.6 GPF			
			- Francisco d	TET1UB32#CP	TET1LB32#CP	TET1GB32#CP					
	Floor Mounted	CT725CU(G)	Exposed	TET6UB32#CP	TET6LB32#CP	TET6GB32#CP	TMT1LN32#CP	TMT1NNC-32			
	Top Spud		Concealed	TET2UB32#SS	TET2LB32#SS	TET2GB32#SS	IMITILN32#CP	TIMIT IININC-32			
			Concealed	TET3UB32#SS	TET3LB32#SS	TET3GB32#SS					
			Exposed	TET1UB32#CP	TET1LB32#CP	TET1GB32#CP					
	Floor Mounted Top Spud	CT725CUF(G)	Exposed	TET6UB32#CP	TET6LB32#CP	TET6GB32#CP	TMT1LN32#CP	TMT1NNC-32			
TOILET		C1723C01 (0)	Concealed	TET2UB32#SS	TET2LB32#SS	TET2GB32#SS	TITTIEN32#CF	11411 ININC-32			
			Concealed	TET3UB32#SS	TET3LB32#SS	TET3GB32#SS					
		CT728CU(G)	Exposed	TET1UB32#CP	TET1LB32#CP	TET1GB32#CP					
	Wall-Mounted		Lxposed	TET6UB32#CP	TET6LB32#CP	TET6GB32#CP	TMT1LN32#CP	TMT1NNC-32			
	Top Spud	01/2000(0)	Concealed	TET2UB32#SS	TET2LB32#SS	TET2GB32#SS	TITILINGZ#CF	11:11 INING-32			
			Concealed	TET3UB32#SS	TET3LB32#S	TET3GB32#SS					
	Wall-Mounted	CT728CUV(G)	Concealed	TET2UB31#SS	TET2LB31#SS	TET2GB31#SS					
	Back Spud	C1726C0V(G)	Concealed	TET3UB31#SS	TET3LB31#SS	TET3GB31#SS					

1.0 GPF TOILETS OVERVIEW

CARLYLE® II 1G® ONE-PIECE TOILET 1.0 GPF

MS614124CUF(R)(G)





ULTRAMAX® II 1G ONE-PIECE TOILET 1.0 GPF

MS604124CUF(R)(G)













Available Q4 2021


- ► TORNADO FLUSH®, ultra highefficiency (1.0 GPF/3.8 LPF)
- ► CEFIONTECT® ceramic glaze
- ▶ ADA Compliant
- Universal Height
- Decorative one-piece toilet with high profile design
- ► Elongated front bowl with SoftClose® seat (SS114)
- Standard 12" rough-in, less supply
- Optional 10" and 14" rough-in available
- Chrome trip lever
- Meets water efficiency and performance standards
- Skirted design
- ▶ WASHLET® + models available





- ► TORNADO FLUSH, ultra highefficiency (1.0 GPF/3.8 LPF)
- ▶ CEFIONTECT ceramic glaze
- ▶ ADA Compliant
- Universal Height
- Decorative one-piece toilet with high profile design
- Elongated front bowl with SoftClose seat (SS114)
- Standard 12" rough-in, less supply
- ▶ Chrome trip lever
- Meets water efficiency and performance standards
- WASHLET+ models available





- ▶ TORNADO FLUSH, ultra highefficiency (1.0 GPF/3.8 LPF)
- ► CEFIONTECT ceramic glaze
- ADA Compliant
- Universal Height
- Decorative two-piece design with high-profile tank
- Elongated front bowl and tank set, less seat
- Standard 12" rough-in, less supply
- Optional 10" and 14" rough-in available
- Chrome trip lever
- Meets water efficiency and performance standards
- Skirted design
- Available in #01 Cotton only
- ▶ WASHLET+ models available


























1.0 GPF TOILETS **OVERVIEW**

DRAKE® II 1G TWO-PIECE TOILET 1.0 GPF

CST454CUF(R)(G)



















- ► TORNADO FLUSH®, ultra highefficiency (1.0 GPF/3.8 LPF)
- ▶ CEFIONTECT® ceramic glaze
- ► ADA Compliant
- Universal Height
- Decorative two-piece design with high-profile tank
- ▶ Elongated front bowl and tank set, less seat
- ▶ Standard 12" rough-in, less supply
- Chrome trip lever
- Meets water efficiency and performance standards
- ▶ WASHLET® + models available

- > TORNADO FLUSH, ultra highefficiency (1.0 GPF/3.8 LPF)
- CEFIONTECT ceramic glaze
- **ADA Compliant**
- Universal Height
- Decorative two-piece design with high-profile tank
- Round front bowl and tank set, less seat
- Standard 12" rough-in, less supply
- Chrome trip lever
- Meets water efficiency and performance standards





15"

(382mm)

30" (761mm)

















14 - 1/6"

(358mm)

17-1/4" (441 mm)



1.28 GPF TOILETS OVERVIEW

DRAKE® TWO-PIECE TOILET 1.28 GPF CST776CE(R)



DRAKE TWO-PIECE TOILET 1.28 GPF CST776CEF(R)(G)



DRAKE - 10"
TWO-PIECE TOILET
1.28 GPF
CST776CEF(R)(G).10



DRAKE - ROUND TWO-PIECE TOILET 1.28 GPF CST775CEF(R)(G)
















- TORNADO FLUSH® system, high-efficiency (1.28 GPF/4.8 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Elongated front bowl, seat sold separately
- ▶ Chrome plated trip lever
- ▶ 12" Rough-in, supply line sold separately
- ▶ TORNADO FLUSH® system, high-efficiency (1.28 GPF/4.8 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Elongated front bowl, seat sold separately
- Chrome plated trip lever
- ▶ 12" Rough-in, supply line sold separately
- TORNADO FLUSH® system, high-efficiency (1.28 GPF/4.8 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Elongated front bowl, seat sold separately
- Chrome plated trip lever
- ▶ 10" Rough-in, supply line sold separately
- TORNADO FLUSH® system, high-efficiency (1.28 GPF/4.8 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Round front bowl, seat sold separately
- Universal Height
- ▶ Chrome plated trip lever
- 12" Rough-in, supply line sold separately
- ADA compliant for residential or hospitality use
































1.28 GPF TOILETS **OVERVIEW**

ENTRADA® TWO-PIECE TOILET 1.28 GPF

CST244EF(R) (Elongated)



ENTRADA - ROUND TWO-PIECE TOILET 1.28 GPF

CST243EF(R) (Round)



DRAKE TRANSITIONAL TWO-PIECE TOILET 1.28 GPF

CST786CE(F)(G) (Elongated) CST786CEFG.10 (Elongated)




DRAKE TRANSITIONAL TWO-PIECE TOILET 1.28 GPF

CST785CEF(G) (Round)







- Elongated bowl
- Universal Height
- ADA compliant
- Close coupled, elongated front bowl and tank set. less toilet seat
- Chrome trip lever
- Optional right-hand trip lever(R)
- ▶ 12" Rough-in

14 - 3/8"

(366mm)

Available in #01 Cotton only



- E-MAX flushing system, highefficiency (1.28 gpf/4.8 LPF)
- Rounded bowl
- Universal Height
- Close coupled, round front bowl and tank set, less toilet seat
- Chrome trip lever
- Optional right-hand trip lever(R)
- ▶ 12" Rough-in
- Available in #01 Cotton only




- ▶ TORNADO FLUSH® system, high-efficiency (1.28 GPF/4.8 LPF)
- Transitional style tank
- ► CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Elongated front bowl, seat sold separately
- Chrome plated trip lever
- 12" and 10" Rough-in options available, supply line sold separately





- ► TORNADO FLUSH® system, high-efficiency (1.28 GPF/4.8 LPF)
- Transitional style tank
- ► CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Round front bowl, seat sold separately
- Universal Height
- Chrome plated trip lever
- 12" Rough-in, supply line sold separately
- ADA compliant for residential or hospitality use

CST786CE(F)(G) (Elongated)

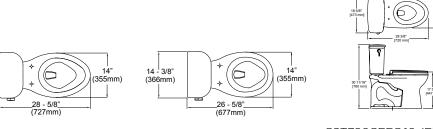









CST786CEFG.10 (Elongated)





COMMERCIAL TOILETS OVERVIEW

NEW

COMMERCIAL FLUSHOMETER HIGH-EFFICIENCY TOILET 1.0/1.28/1.6 GPF CT725CU(G)



NEW

COMMERCIAL FLUSHOMETER HIGH-EFFICIENCY TOILET 1.0/1.28/1.6 GP CT725CUF(G)



NEW

COMMERCIAL FLUSHOMETER HIGH-EFFICIENCY WALL-HUNG TOILET 1.0/1.28/1.6 GP CT728CU(G)



COMMERCIAL FLUSHOMETER HIGH-EFFICIENCY WALL-HUNG TOILET 1.0/1.28/1.6 GP CT728CUV(G)





- ► TORNADO FLUSH® is a sustainable, high-performance system that effectively removes waste, utilizing 360° of cleaning power to scour the bowl and rim
- Floor-mounted
- ▶ Elongated front bowl
- Optional CEFIONTECT ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Clear glazed trapway coating
- 10"-12" rough-in
- Available in cotton #01 only



- TORNADO FLUSH is a sustainable, high-performance system that effectively removes waste, utilizing 360° of cleaning power to scour the bowl and rim
- ▶ Floor-mounted
- ADA compliant
- UNIVERSAL HEIGHT
- Elongated front bowl
- Optional CEFIONTECT ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Clear glazed trapway coating

14"

(355mm)

10"-12" rough-in

12" rough-in dimensions

26 - 1/8 (663mm)

0

14'

Available in cotton #01 only




- ▶ TORNADO FLUSH is a sustainable, high-performance system that effectively removes waste, utilizing 360º of cleaning power to scour the
- bowl and rim Wall-mounted
- Elongated front bowl
- Optional CEFIONTECT ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Clear glazed trapway coating
- Maximum static load rating of 1000 lbs when used with appropriate wall carrier
- For compatible flush valves, see page 10
- Available in cotton #01 only





- ▶ TORNADO FLUSH is a sustainable, high-performance system that effectively removes waste, utilizing 360º of cleaning power to scour the bowl and rim
- Wall-mounted
- ▶ Elongated front bowl
- Optional CEFIONTECT ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Clear glazed trapway coating
- Maximum static load rating of 1000 lbs when used with appropriate wall carrier
- For compatible flush valves, see page 10
- Available in cotton #01 only





12" rough-in dimensions


















15"

(380mm)




TOILET SEATS OVERVIEW

COMMERCIAL SEAT SC534




- ▶ Elongated open front toilet seat
- Mounting hardware included



COMMERCIAL **SEAT** SC134

- Open front toilet seat and cover
- Mounting hardware included



COMMERCIAL URINALS OVERVIEW

URINAL FLUSH VALVE

COM	PATIBI	ILIIY		FLUSHOMETER								
СПА	ΚI				ECOPOWER®	MANUAL						
	PRODUCT	SKU#		0.125 GPF	0.5 GPF	1.0 GPF	0.5 GPF	1.0 GPF				
	Full Size Top Spud	UT445U	Exposed	TEU1UA12#CP								
	Full Size Back Spud	UT445UV		TEU2UA11#SS								
		U1445UV	Concealed	TEU3UA11#SS								
URINAL	Compact Top Spud	UT105U(G)	Exposed	TEU1UA12#CP								
	Compact Back Spud	UT105UV(G)	Concealed	TEU2UA11#SS								
				TEU3UA11#SS								
	Full Size	UT447E	E		TEU1LA12#CP	TEU1GA12#CP	TMU1LN12#CP	TMU1NNC-12				
	Top Spud	U1447E	Exposed				TMU1LN22#CP	TMU1NNC-22				
	Full Size	UT447EV			TEU2LA11#SS							
	Back Spud	0144/EV	Concealed		TEU3LA11#SS							
	Compact	UT104E	E		TEU1LA12#CP	TEU1GA12#CP	TMU1LN12#CP	TMU1NNC-12				
	Top Spud	01104E	Exposed				TMU1LN22#CP	TMU1NNC-22				
	Compact	UT104EV			TEU2LA11#SS							
	Back Spud	UTIU4EV	Concealed		TEU3LA11#SS							



COMMERCIAL URINALS OVERVIEW

WASHOUT ULTRA HIGH-EFFICIENCY URINAL 0.125 GPF UT445U









WASHOUT ULTRA HIGH-EFFICIENCY URINAL 0.125 GPI UT445UV







WASHOUT ULTRA HIGH-EFFICIENCY URINAL 0.125 GPF UT105U(G)









WASHOUT ULTRA HIGH-EFFICIENCY URINAL 0.125 GPF UT105UV(G)





















- Full size urinal with integral trap
- ▶ Washout flush action with 3/4" top spud inlet
- ▶ 0.125 gpf
- Complete with low profile dome strainer
- For compatible flush valves, see page 16
- Full size urinal with concealed integral trap
- Washout flush action with 3/4" back spud inlet
- ▶ 0.125 gpf
- Complete with low profile dome strainer
- For compatible flush valves. see page 16
- ▶ Compact urinal with integral trap
- Washout flush action with 3/4" top spud inlet
- 0.125 GPF
- Complete with low profile dome strainer
- ▶ Optional CEFIONTECT® glaze prevents debris from sticking to ceramic surfaces, making them easier to clean
- For compatible flush valves, see page 16


- Compact urinal with concealed integral trap
- Washout flush action with 3/4" back spud inlet
- ▶ 0.125 GPF
- Complete with low profile dome strainer
- Optional CEFIONTECT glaze prevents debris from sticking to ceramic surfaces, making them easier to clean
- For compatible flush valves, see page 16


























COMMERCIAL URINALS

OVERVIEW

WASHOUT HIGH-EFFICIENCY URINAL 0.5 GPF

UT447E

WASHOUT HIGH-EFFICIENCY URINAL 0.5 GPF UT447EV WASHOUT HIGH-EFFICIENCY URINAL 0.5 GPF UT104E WASHOUT HIGH-EFFICIENCY URINAL 0.5 GPF UT104EV

& CALGreen

















- Full size urinal with concealed integral trap
- Washout flush action with 3/4" top spud inlet
- 0.5 gpf
- For compatible flush valves, see page 16
- Full size urinal with concealed integral trap
- Washout flush action with 3/4" back spud inlet
- ▶ 0.5 gpf


3/4" (19mm) Spud

- For compatible flush valves, see page 16
- Compact urinal with concealed integral trap
- Washout flush action with 3/4" top spud inlet
- ▶ 0.5 gpf
- For compatible flush valves, see page 16
- Compact urinal with concealed integral trap
- Washout flush action with 3/4" back spud inlet
- ▶ 0.5 gpf
- For compatible flush valves, see page 16




- 17-1/2" – (444mm)















THE POWER OF RECLAIMED WATER

Innovation & Technology Highlights

COMMITTED TO SAVING WATER DROP BY DROP.





Water conservation extends far beyond the amount we use. Reclaimed water aims to reduce the amount of potable water used in our toilet systems. Recycling water already used for toilets conserves our precious, finite sources of fresh water.

COMMERCIAL TOILETS OVERVIEW



COMMERCIAL FLUSHOMETER FLOOR-MOUNTED TOILET CT725CU(G)X



NEW

COMMERCIAL FLUSHOMETER ADA FLOOR-MOUNTED TOILET CT725CUF(G)X



NEW

COMMERCIAL FLUSHOMETER TOP SPUD WALL-HUNG TOILET 1.0/1.28 GP CT728CU(G)X





- ► TORNADO FLUSH® is a sustainable, high-performance system that effectively removes waste, utilizing 360° of cleaning power to scour the bowl and rim
- ▶ Floor-mounted
- ▶ Elongated front bowl
- Optional CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Clear glazed trapway coating
- 10"-12" rough-in
- Designed for reclaimed water use
- Available in cotton #01 only




- TORNADO FLUSH is a sustainable, high-performance system that effectively removes waste, utilizing 360° of cleaning power to scour the bowl and rim
- Floor-mounted
- ADA compliant
- UNIVERSAL HEIGHT
- Elongated front bowl
- Optional CEFIONTECT ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Clear glazed trapway coating
- 10"-12" rough-in
- Designed for reclaimed water use
- Available in cotton #01 only





- ▶ TORNADO FLUSH is a sustainable, high-performance system that effectively removes waste, utilizing 360° of cleaning power to scour the bowl and rim.
- Wall-mounted
- ▶ Elongated front bowl
- Optional CEFIONTECT ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Clear glazed trapway coating
- Designed for reclaimed water use
- Maximum static load rating of 1000 lbs when used with appropriate wall carrier
- For compatible flush valves, see page 21
- Available in cotton #01 only


12" rough-in dimensions





















TOILET FLUSH VALVES OVERVIEW

NEW

ECOPOWER EXPOSED TOILET FLUSH VALVE

TET1UBX - 1.0 GPF TET1LBX - 1.28 GPF










- Designed with robust materials necessary for reclaimed water use
- Self-powered hydroelectric flush valve system
- No minimum daily usage requirement
- Durable chrome plated body with tamperproof screws and solid bronze valve body
- Self-cleaning piston valve with 360° filter screen
- Neutral rough-in and adjustable tail piece connection
- True mechanical flush override
- Smart sensor with self-adjusting detection range
- ▶ 6 second detection time to prevent ghost flushing
- For toilet with 1-1/2" top spud inlet
- Exposed flush valve with 1" angle stop and 1-1/2" vacuum breaker set
- Contributes to earning credits in LEED®
- Protects trap seal with a maintenance flush if not used in a 24 hr period
- ▶ ADA compliant







COMMERCIAL URINALS OVERVIEW

WASHOUT HIGH-EFFICIENCY URINAL 0.5 GPF

UT447EX



WASHOUT ULTRA HIGH-EFFICIENCY URINAL 0.125 GPI UT445UX



WASHOUT HIGH-EFFICIENCY URINAL 0.5 GPF UT104EX



WASHOUT ULTRA HIGH-EFFICIENCY URINAL 0.125 GPF UT105U(G)X



















- Designed for reclaimed water
- Full size urinal with concealed integral trap
- Washout flush action with 3/4" top spud inlet
- For compatible flush valves, see page 23
- ADA compliant


- Designed for reclaimed water
- Full size urinal with integral trap
- Washout flush action with 3/4" top spud inlet
- Complete with low profile dome strainer
- For compatible flush valves. see page 23
- ADA compliant


- Designed for reclaimed water
- Compact urinal with concealed integral trap
- Washout flush action with 3/4" top spud inlet
- For compatible flush valves, see page 23
- ADA compliant


- Designed for reclaimed water
- Compact urinal with integral trap
- Washout flush action with 3/4" top spud inlet
- Complete with low profile dome strainer
- ▶ Optional CEFIONTECT® glaze prevents debris from sticking to ceramic surfaces, making them easier to clean
- For compatible flush valves, see page 23
- ADA compliant
























URINAL FLUSH VALVES OVERVIEW

ECOPOWER EXPOSED URINAL FLUSH VALVE TEU1UAX - 0.125 GPF TEU1LAX - 0.5 GPF





- Designed with robust materials necessary for reclaimed water
- Self-powered hydroelectric flush valve system
- No minimum daily usage requirement
- Durable chrome plated body with tamper-proof screws and solid bronze valve body with **EPD** coating
- Self-cleaning piston valve with 360° filter screen
- Neutral rough-in and adjustable tail piece connection
- ▶ True mechanical flush override
- > Smart sensor with selfadjusting detection range
- ▶ 6-second detection time to prevent ghost flushing
- ADA compliant







The security of TOUCHLESS

A new world. A better way to clean.









TOILET FLUSH VALVES OVERVIEW

NEW

ECOPOWER® CONCEALED

TET2UB - 1.0 GPF TET2LB - 1.28 GPF TET2GB - 1.6 GPF









NEW

ECOPOWER CONCEALED TOILET FLUSH VALVE

TET3UB- 1.0 GPF TET3LB - 1.28 GPF TET3GB - 1.6 GPF







NEW

ECOPOWER EXPOSED TOILET FLUSH VALVE

TET1UB - 1.0 GPF TET1LB - 1.28 GPF TETIGB - 1.6 GPF










- Self-powered hydroelectric flush valve system
- No minimum daily usage requirement
- ▶ Heavy duty 14" x 12" stainless steel cover plate with satin finish and solid bronze valve body
- Self-cleaning piston valve with 360° filter screen
- Neutral rough-in and adjustable tail piece connection
- Manual flush override
- Smart sensor with self-adjusting detection range
- 6 second detection time to prevent ghost flushing
- Concealed flush valve with 1" angle stop and 1-1/2" vacuum breaker set
- *Contributes to earning credits in LEED®
- Protects trap seal with a maintenance flush if not used in a 24 hr period
- ADA compliant
- Available in Stainless Steel (#SS) only





- Self-powered hydroelectric flush valve system
- No minimum daily usage requirement
- ▶ 4" x 4" stainless steel cover plate with brushed satin finish and solid bronze valve body
- Self-cleaning piston valve with 360° filter screen
- Neutral rough-in and adjustable tail piece connection
- Manual flush override
- Smart sensor with self-adjusting detection range
- 6 second detection time to prevent ghost flushing
- Concealed flush valve with 1" angle stop and 1-1/2" vacuum breaker set
- *Contributes to earning credits in LEED
- Protects trap seal with a maintenance flush if not used in a 24 hr period
- ADA compliant
- Available in Stainless Steel (#SS) only





- Self-powered hydroelectric flush valve system
- No minimum daily usage requirement
- Durable chrome plated body with tamper proof screws and solid bronze valve body
- Self-cleaning piston valve with 360° filter screen
- Neutral rough-in and adjustable tail piece connection
- True mechanical flush override
- Smart sensor with self-adjusting detection range
- 6 second detection time to prevent ghost flushing
- For toilet with 1-1/2" top spud inlet
- Exposed flush valve with 1" angle stop and 1-1/2" vacuum breaker set
- *Contributes to earning credits in LEED
- Protects trap seal with a maintenance flush if not used in a 24 hr period
- ADA compliant
- Available in Polished Chrome (#CP) only











TOILET FLUSH VALVES OVERVIEW



ECOPOWER EXPOSED 24" VACUUM BREAKER TOILET FLUSH VALVE

TET6UB - 1.0 GPF

TET6LB - 1.28 GPF TET6GB - 1.6 GPF











- Self-powered hydroelectric flush valve system
- No minimum daily usage requirement
- Durable chrome plated body with tamper-proof screws and solid bronze valve body
- Self-cleaning piston valve with 360° filter screen
- Neutral rough-in and adjustable tail piece connection
- True mechanical flush override
- > Smart sensor with self-adjusting detection range
- ▶ 6-second detection time to prevent ghost flushing
- For toilet with 1-1/2" top spud inlet using 24" vacuum breaker bar
- *Contributes to earning credits in LEED
- ADA compliant
- Available in Polished Chrome (#CP) only


MANUAL TOILET **FLUSH VALVE**

TMT1LN32 - 1.28 GPF TMT1NNC-32 - 1.6 GPF





- Manual operated, non-hold open, toilet flush valve complete with 1" angle stop and 1-1/2" vacuum breaker set
- Piston valve action with 1.28/1.6 GPF
- ▶ Left/right rough-in
- Top spud exposed
- ▶ ADA compliant
- ▶ Available in Polished Chrome (#CP) only











URINAL FLUSH VALVES OVERVIEW

ECOPOWER CONCEALED URINAL FLUSH VALVE TEU2UAR - 0.125 GPF TEU2LAR - 0.5 GPF



ECOPOWER CONCEALED URINAL FLUSH VALVE TEU3UAR - 0.125 GPF TEU3LAR - 0.5 GPF



ECOPOWER EXPOSED URINAL FLUSH VALVE TEU1UAR - 0.125 GPF TEU1LAR - 0.5 GPF TEUIGAR - 1.0 GPF



MANUAL URINAL **FLUSH VALVE** TMU1LN12 - 0.5 GPF TMU1NNC-12 - 1.0 GPF















- Self-powered hydroelectric flush valve system
- No minimum daily usage requirement
- ▶ 14" x 12" stainless steel cover plate with solid bronze valve body
- Neutral rough-in and adjustable tail piece connection
- Self-cleaning piston valve with 360° filter screen‡
- Manual flush override
- Smart sensor with selfadjusting detection range
- 6-second detection time to prevent ghost flushing
- ADA compliant
- Available in Stainless Steel (#SS) only






- Self-powered hydroelectric flush valve system
- No minimum daily usage requirement
- 4" x 4" brushed stainless steel cover plate with solid bronze valve body
- Neutral rough-in and adjustable tail piece connection
- Self-cleaning piston valve with 360° filter screen‡
- Manual flush override
- Smart sensor with selfadjusting detection range
- 6-second detection time to prevent ghost flushing
- ADA compliant
- Available in Stainless Steel (#SS) only






- Self-powered hydroelectric flush valve system
- No minimum daily usage requirement
- Durable chrome plated body with tamper-proof screws and solid bronze valve body
- Self-cleaning piston valve with 360° filter screen‡
- Neutral rough-in and adjustable tail piece connection
- True mechanical flush override
- Smart sensor with selfadjusting detection range and fuzzy logic control‡ to reduce water usage
- 6-second detection time to prevent ghost flushing
- ADA compliant
- Available in Polished Chrome (#CP) only

- Manual operated, non-hold open, urinal flush valve complete with 3/4" angle stop and 3/4" or 1-1/4" vacuum breaker set
- Piston valve action with 0.5/1.0 apf
- Left/right rough-in
- Top spud exposed
- ▶ ADA compliant
- Available in Polished Chrome (#CP) only












COMMERCIAL ECOPOWER® FAUCETS

Innovation & Technology Highlights



ECOPOWER harnesses the energy of running water to power TOTO smart-sensor faucets or flush valves' electronics, replenishing them with every use. No minimum daily usage requirement, which translates into reduced electricity use, lower maintenance costs, and better ecology.

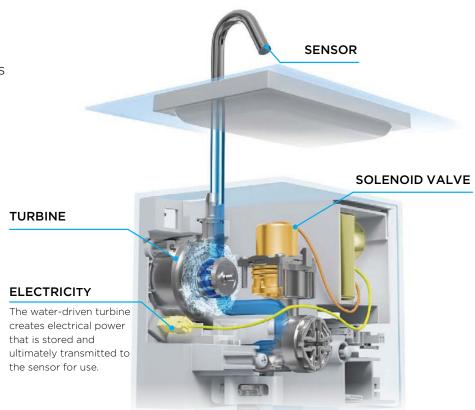

ECOPOWER ADVANTAGE

- Sustainably engineered to require no external electricity source
- Hydropower system needs no routine battery replacement which lowers maintenance costs
- Strategically placed sensor ensures instantaneous water response, minimizing water wastage
- Hands-free operation reduces the chance of spreading contaminants

TOTO COMMERCIAL PERFORMANCE

A WIN-WIN. Unlike other sensor faucets, ECOPOWER faucets use hydropower to operate the sensor. The flow of water, which meets the most rigorous water saving standards, spins the high-efficiency turbine to both create and store power for operation. TOTO's proprietary sensor technology has been perfected over the past 15 years.

NEW

ECOPOWER® OR AC TOUCHLESS FAUCET		KIT (INCLUDES SPOUT & CONTROLLER)										
	PM / 1.0		0.12 GP	C, (20 SEC-01 @ 0.35 GP	N DEMAND) M			0.18 G	iPC, (10 SEC-ON @ 1.0 GPM	DEMAND)		
PRODUCT	SPOUT	TYPE	SINGLE SUPPLY	HOT/COLD MIXING VALVE	THERMOSTATIC MIXING VALVE	SPOUT	TYPE	SINGLE SUPPLY	HOT/COLD MIXING VALVE	THERMOSTATIC MIXING VALVE		
				TLM10	TLE05701U	•			TLM10	TLE05701U		
Aviem	TI [2[001]]2	ECOPOWER	T25S32E#CP	T25S32EM#CP	T25S32ET#CP		,					
Axiom	TLE25001U2	AC	T25S32A#CP	T25S32AM#CP	T25S32AT#CP							
Axiom	TLESEOUZIIS	ECOPOWER	T25T32E#CP	T25T32EM#CP	T25T32ET#CP							
Vessel	TLE25003U2	AC	T25T32A#CP	T25T32AM#CP	T25T32AT#CP							
Axiom	TITZENNEIIZ	ECOPOWER	T25L32E#CP	T25L32EM#CP	T25L32ET#CP							
Wall-Mount	TLE25005U2	AC	T25L32A#CP	T25L32AM#CP	T25L32AT#CP				T28511EM#CP T27511EM#CP T27511EM#CP			
	TI F31001113	ECOPOWER	T21S32E#CP	T21S32EM#CP	T21S32ET#CP							
GC	TLE21001U2	AC	T21S32A#CP	T21S32AM#CP	T21S32AT#CP							
CF	TI F20001112	ECOPOWER	T20S32E#CP	T20S32EM#CP	T20S32ET#CP							
GE	TLE20001U2	AC	T20S32A#CP	T20S32AM#CP	T20S32AT#CP							
CM	TI [22001]]2	ECOPOWER	T22S32E#CP	T22S32EM#CP	T22S32ET#CP							
GM	TLE22001U2	AC	T22S32A#CP	T22S32AM#CP	T22S32AT#CP				T28511EM#CP T27511EM#CP T27511EM#CP			
Caasanask	TI F24001U2	ECOPOWER	T24S32E#CP	T24S32EM#CP	T24S32ET#CP							
Gooseneck	TLE24001U2	AC	T24S32A#CP	T24S32AM#CP	T24S32AT#CP							
Gooseneck	TLE24003U2	ECOPOWER	T24T32E#CP	T24T32EM#CP	T24T32ET#CP							
Vessel	1162400302	AC	T24T32A#CP	T24T32AM#CP	T24T32AT#CP							
Haliv	TI F26001112	ECOPOWER	T26S32E#CP	T26S32EM#CP	T26S32ET#CP							
Helix	TLE26001U2	AC	T26S32A#CP	T26S32AM#CP	T26S32AT#CP				T28511EM#CP T27511EM#CP T27511EM#CP			
Haliy Vassal	TLESCOOTUS	ECOPOWER	T26T32E#CP	T26T32EM#CP	T26T32ET#CP				TLM10 T28511EM#CP T28511AM#CP T27511AM#CP			
Helix Vessel	TLE26003U2	AC	T26T32A#CP	T26T32AM#CP	T26T32AT#CP							
Helix Wall	TLESCONFIIS	ECOPOWER	T26L32E#CP	T26L32EM#CP	T26L32ET#CP				T28511EM#CP T27511EM#CP T27511EM#CP			
Mount	TLE26005U2	AC	T26L32A#CP	T26L32AM#CP	T26L32AT#CP							
Libella Semi-	TLESTAGOLIS	ECOPOWER	T23M32E#CP	T23M32EM#CP	T23M32ET#CP				T28511EM#CP T27511EM#CP T27511EM#CP			
Vessel	TLE23002U2	AC	T23M32A#CP	T23M32AM#CP	T23M32AT#CP							
Libella	TIESZONEIIS	ECOPOWER	T23L32E#CP	T23L32EM#CP	T23L32ET#CP							
Wall-Mount	TLE23005U2	AC	T23L32A#CP	T23L32AM#CP	T23L32AT#CP				T28511EM#CP T27511EM#CP T27511EM#CP			
Standard D	TLE28001U2	ECOPOWER	T28S32E#CP	T28S32EM#CP	T28S32ET#CP	TLE28003U1	ECOPOWER	T28S11E#CP	T28S11EM#CP	T28S11ET#CP		
Standard-R	ILLZOUUIUZ	AC	T28S32A#CP	T28S32AM#CP	T28S32AT#CP	ILLZOUUSUI	AC	T28S11A#CP	T28S11AM#CP	T28S11AT#CP		
Standard-S	TLE27001U2	ECOPOWER	T27S32E#CP	T27S32EM#CP	T27S32ET#CP	TLE27003U1	ECOPOWER	T27S11E#CP	T27S11EM#CP	T27S11ET#CP		
Stanuaru-3	1112700102	AC	T27S32A#CP	T27S32AM#CP	T27S32AT#CP	1112700301	AC	T27S11A#CP	T27S11AM#CP	T27S11AT#CP		
				A	AVAILABLE \	VALVES						
H	OT/COLD	MIXING V	ALVE		THERMOSTATIC MIXING VALVE (FOR 0.35, 0.5 & 1.0 GPM FAUCETS)							
	TL	_M10			TLE05701U							

NEW

ECOPOWER® OR AC KIT (INCLUDES SPOUT & CONTROLLER) **TOUCHLESS FAUCET** 0.8 GPC, (10 SEC-ON DEMAND) @ 0.5 GPM 0.17 GPC, (20 SEC-CONTINUOUS) @ 0.5 GPM 0.5 GPM THERMOSTATIC MIXING HOT/COLD HOT/COLD THERMOSTATIC MIXING VALVE MIXING SINGLE SUPPLY SINGLE VALVE VALVE **PRODUCT SPOUT TYPE SPOUT TYPE** VAIVE TLM10 TLE05701U TLM10 TLE05701U **ECOPOWER** T25S51E#CP T25S51EM#CP T25S51ET#CP **ECOPOWER** T25S53E#CP T25S53EM#CP T25S53ET#CP TLE25006U1 TLE25006U3 Axiom T25S51AT#CP A(T25S51A#CP T25S51AM#CP A(T25S53A#CP T25S53AM#CP T25S53AT#CP **ECOPOWER** T25T51E#CP T25T51EM#CP T25T51ET#CP T25T53E#CP T25T53EM#CP T25T53ET#CP **ECOPOWER** Axiom TLE25008U1 TLE25008U3 Vessel A(T25T51A#CP T25T51AM#CP T25T51AT#CP T25T53A#CP T25T53AM#CP T25T53AT#CP **ECOPOWER** T25L51E#CP T25L51EM#CP T25L51ET#CP **ECOPOWER** T25L53E#CP T25L53EM#CP T25L53ET#CP Axiom TLE25010U1 TLE25010U3 Wall-Mount T25L51A#CP T25L51AM#CP T25L51AT#CP ACT25L53A#CP T25L53AM#CP T25L53AT#CP AC **ECOPOWER** T21S51E#CP T21S51EM#CP T21S51ET#CP **ECOPOWER** T21S53E#CP T21S53EM#CP T21S53ET#CP GC TLE21006U1 TLE21006U3 AC T21S51A#CP T21S51AM#CP T21S51AT#CP ACT21S53A#CP T21S53AM#CP T21S53AT#CP **ECOPOWER** T20S51E#CP T20S51EM#CP T20S51ET#CP **ECOPOWER** T20S53E#CP T20S53EM#CP T20S53ET#CP GE TLE20006U1 TLE20006U3 ACT20S51A#CP T20S51AM#CP T20S51AT#CP A(T20S53A#CP T20S53AM#CP T20S53AT#CP **ECOPOWER** T22S51F#CP T22S51FM#CP T22S51FT#CP **ECOPOWER** T22S53F#CP T22S53FM#CP T22S53FT#CP GM TLE22006U1 TLE22006U3 A(T22S51A#CP T22551AM#CP T22551AT#CP A(T22553A#CP T22553AM#CP T22553AT#CP **ECOPOWER** T24S51E#CP T24S51EM#CP T24S51ET#CP **ECOPOWER** T24S53E#CP T24S53EM#CP T24S53ET#CP TLE24006U1 TLE24006U3 Gooseneck T24S51A#CP T24S51AM#CP T24S51AT#CP T24S53AT#CP AC A(T24S53A#CP T24S53AM#CP **ECOPOWER** T24T51F#CP T24T51FM#CP T24T51FT#CP **ECOPOWER** T24T53F#CP T24T53FM#CP T24T53FT#CP Gooseneck TLE24008U1 TLE24008U3 Vessel T24T51A#CP T24T51AM#CP T24T51AT#CP T24T53A#CP T24T53AM#CP T24T53AT#CP A(A(**ECOPOWER** T26S51E#CP T26S51FM#CP T26S51FT#CP **FCOPOWFR** T26S53F#CP T26S53FM#CP T26S53FT#CP TLE26006U1 TLE26006U3 Helix T26S51A#CP T26S51AM#CP T26S51AT#CP AC AC T26S53A#CP T26S53AM#CP T26S53AT#CP **ECOPOWER** T26T51EM#CP T26T51E#CP T26T51ET#CP **ECOPOWER** T26T53E#CP T26T53EM#CP T26T53ET#CP Helix TLE26008U1 TLE26008U3 Vessel T26T51A#CP T26T51AM#CP T26T51AT#CP T26T53A#CP T26T53AM#CP T26T53AT#CP AC AC **ECOPOWER** T26L53ET#CP T26L51E#CP T26L51EM#CP T26L51ET#CP **ECOPOWER** T26L53E#CP T26L53EM#CP Helix TLF26010U1 TLE26010U3 Wall-Mount T26L51A#CP T26L51AT#CP AC T26L51AM#CP AC T26L53A#CP T26L53AM#CP T26L53AT#CP **ECOPOWER** T23M51E#CP T23M51FM#CP T23M51ET#CP **ECOPOWER** T23M53E#CP T23M53EM#CP T23M53ET#CP Libella Semi-TLE23007U1 TLE23007U3 Vessel T23M51A#CP T23M51AT#CP T23M51AM#CP T23M53A#CP T23M53AM#CP T23M53AT#CP AC Aſ **ECOPOWER** T23L51E#CP T23L51EM#CP T23L51ET#CP **ECOPOWER** T23L53E#CP T23L53EM#CP T23L53FT#CP Libella TLE23010U1 TLE23010U3 Wall-Mount Aſ T23L51A#CP T23L51AM#CP T23L51AT#CP AC T23L53A#CP T23L53AM#CP T23L53AT#CP **ECOPOWER** T28S51E#CP T28S51EM#CP T28S51ET#CP **ECOPOWER** T28S53E#CP T28S53EM#CP T28S53ET#CP TLE28002U1 TLE28002U3 Standard-R T28S51A#CP T28S51AM#CP T28S51AT#CP T28S53A#CP T28S53AM#CP T28S53AT#CP AC AC Standard-R TLE31002U1 ACT28S51S#CP T28S51SM#CP T28S51ST#CP EWATER+® **ECOPOWER** T27S51E#CP T27S51EM#CP **ECOPOWER** T27S51ET#CP T27S53E#CP T27S53EM#CP T27S53ET#CP TLE27002U1 TLE27002U3 Standard-S T27S51A#CP T27S51AM#CP T27S51AT#CP T27S53A#CP T27S53AM#CP T27S53AT#CP AC AC **AVAILABLE VALVES** THERMOSTATIC MIXING VALVE HOT/COLD MIXING VALVE (FOR 0.35, 0.5 & 1.0 GPM FAUCETS) TLM10 TLE05701U

TOUCHLESS FAUCETS OVERVIEW

AXIOM®

ECOPOWER FAUCET
T25S51E (0.5 GPM/0.09 GPC)
T25S53E (0.5 GPM/0.19 GPC)
T25S32E (0.35 GPM/0.12 GPC) **AC POWER FAUCE**

T25S51A (0.5 GPM/0.09 GPC) 25S53A (0.5 GPM/0.19 GPC T25S32A (0.35 GPM/0.12 GPĆ)









AXIOM® VESSEL

ECOPOWER FAUCET
T25T51E (0.5 GPM/0.09 GPC)
T25T53E (0.5 GPM/0.19 GPC)
T25T32E (0.35 GPM/0.12 GPC) **AC POWER FAUCET** T25T51A (0.5 GPM/0.09 GPC)

753A (0.5 GPM/0.19 GPC) T25T32A (0.35 GPM/0.12 GPĆ)











5L53A (0.5 GPM/0.19 GPC) 5L32A (0.35 GPM/0.12 GPC)

AXIOM WALL-MOUNT

AC POWER FAUCET

T25L51E (0.5 GPM/0.09 GPC) T25L53E (0.5 GPM/0.19 GPC) T25L53E (0.35 GPM/0.12 GPC)

T25L51A (0.5 GPM/0.09 GPC)

ECOPOWER FAUCET T21S51E (0.5 GPM/0.09 GPC)

T21S51E (0.5 GPM/0.09 GPC) T21S53E (0.5 GPM/0.19 GPC) T21S32E (0.35 GPM/0.12 GPC) AC POWER FAUCET

T21S51A (0.5 GPM/0.09 GPC) IS53A (0.5 GPM/0.19 GPC) T21S32A (0.35 GPM/0.12 GPC)













- The choice of self-generating hydropowered ECOPOWER® system or AC system
- Micro-sensor positioned underneath the spout head provides accurate hand detection and ensures smooth. consistent water distribution
- Vandal resistant nozzle
- Aerated flow
- Durable chrome plated spout body
- Kit includes spout body, controller box, and mounting hardware (supply lines not included)
- 0.35 gpm aerated flow
- Contributes to earning LEED® credits
- ▶ Equipped with 0.35 gpm flow control. 0.12 gpc, 20 sec ondemand flow






- The choice of self-generating hydropowered ECOPOWER® system or AC system
- Micro-sensor positioned underneath the spout head provides accurate hand detection and ensures smooth. consistent water distribution
- Vandal resistant nozzle
- Aerated flow
- Durable chrome plated spout body
- Kit includes spout body, controller box, and mounting hardware (supply lines not included)
- 0.35 gpm aerated flow
- Contributes to earning LEED®
- Equipped with 0.35 gpm flow control. 0.12 gpc, 20 sec ondemand flow






- The choice of self-generating hydropowered ECOPOWER® system or AC system
- Micro-sensor positioned underneath the spout head provides accurate hand detection and ensures smooth. consistent water distribution
- Vandal resistant nozzle
- Aerated flow
- Durable chrome plated spout body
- Kit includes spout body, controller box, and mounting hardware (supply lines not included)
- 0.35 gpm aerated flow
- Contributes to earning LEED® credits
- Equipped with 0.35 gpm flow control. 0.12 gpc, 20 sec ondemand flow





- The choice of self-generating hydropowered ECOPOWER® system or AC system
- Micro-sensor positioned underneath the spout head provides accurate hand detection and ensures smooth. consistent water distribution
- SOFT FLOW™ flow for strong water flow without the backsplash
- Laminar flow
- Durable chrome plated spout body
- Kit includes spout body, controller box, and mounting hardware (supply lines not included)
- 0.35 gpm aerated flow
- Contributes to earning LEED® credits
- Equipped with 0.35 gpm flow control. 0.12 gpc, 20 sec ondemand flow



TOUCHLESS FAUCETS **OVERVIEW**

T20S51E (0.5 GPM/0.09 GPC) T20S53E (0.5 GPM/0.19 GPC) T20S32E (0.35 GPM/0.12 GPC) AC POWER FAUCET

T20S51A (0.5 GPM/0.09 GPC) T20S53A (0.5 GPM/0.19 GPC) T20S32A (0.35 GPM/0.12 GPĆ)











ECOPOWER FAUCET

T22S32E (0.5 GPM/0.09 GPC) T22S51E (0.5 GPM/0.19 GPC) T22S53E (0.35 GPM/0.12 GPC) AC POWER FAUCET

S32A (0.5 GPM/0.09 GPC) S51A (0.5 GPM/0.19 GPC) T22S53A (0.35 GPM/0.12 GPC)













ECOPOWER FAUCET
T24S51E (0.5 GPM/0.09 GPC)
T24S53E (0.5 GPM/0.19 GPC)
T24S32E (0.35 GPM/0.12 GPC)

T24S51A (0.5 GPM/0.09 GPC)

T24S53A (0.5 GPM/0.19 GPC) T24S32A (0.35 GPM/0.12 GPC)

AC POWER FAUCET











AC POWER FAUCET

GOOSENECK VESSEL

ECOPOWER FAUCET T24T51E (0.5 GPM/0.09 GPC)

T24T31E (0.5 GPM/0.19 GPC) T24T32E (0.5 GPM/0.12 GPC)

T24T51A (0.5 GPM/0.09 GPC)

T24T53A (0.5 GPM/0.19 GPC) T24T32A (0.35 GPM/0.12 GPC)








reddot winner 2021 best of the best

GOOSENECK






- ▶ The choice of self-generating hydropowered ECOPOWER® system or AC system
- Micro-sensor positioned underneath the spout head provides accurate hand detection and ensures smooth. consistent water distribution
- Vandal resistant nozzle
- Aerated flow
- Durable chrome plated spout body
- Kit includes spout body, controller box, and mounting hardware (supply lines not included)
- 0.35 gpm aerated flow
- Contributes to earning LEED® credits
- Equipped with 0.35 gpm flow control. 0.12 gpc, 20 sec ondemand flow






- ▶ The choice of self-generating hydropowered ECOPOWER® system or AC system
- Micro-sensor positioned underneath the spout head provides accurate hand detection and ensures smooth. consistent water distribution
- Vandal resistant nozzle
- Aerated flow
- Durable chrome plated spout body
- Kit includes spout body, controller box, and mounting hardware (supply lines not included)
- 0.35 gpm aerated flow
- Contributes to earning LEED® credits
- Equipped with 0.35 gpm flow control. 0.12 gpc, 20 sec ondemand flow






- The choice of self-generating hydropowered ECOPOWER® system or AC system
- Micro-sensor positioned underneath the spout head provides accurate hand detection and ensures smooth. consistent water distribution
- SOFT FLOW™ flow for strong water flow without the backsplash
- Laminar flow
- Durable chrome plated spout body
- Kit includes spout body, controller box, and mounting hardware (supply lines not included)
- 0.35 apm aerated flow
- Contributes to earning LEED® credits
- Equipped with 0.35 gpm flow control. 0.12 gpc, 20 sec ondemand flow





- The choice of self-generating hydropowered ECOPOWER® system or AC system
- Micro-sensor positioned underneath the spout head provides accurate hand detection and ensures smooth. consistent water distribution
- SOFT FLOW™ flow for strong water flow without the backsplash
- Laminar flow
- Durable chrome plated spout body
- Kit includes spout body, controller box, and mounting hardware (supply lines not included)
- 0.35 apm aerated flow
- Contributes to earning LEED® credits
- Equipped with 0.35 gpm flow control. 0.12 gpc, 20 sec ondemand flow









TOUCHLESS FAUCETS OVERVIEW

HELIX®

T26S51E (0.5 GPM/0.09 GPC) T26S53E (0.5 GPM/0.19 GPC) T26S32E (0.35 GPM/0.12 GPC) AC POWER FAUCET

T26S51A (0.5 GPM/0.09 GPC) T26S53A (0.5 GPM/0.19 GPC) T26S32A (0.35 GPM/0.12 GPĆ)





HELIX VESSEL

ECOPOWER FAUCET T26T51E (0.5 GPM/0.09 GPC) T26T53E (0.5 GPM/0.19 GPC) T26T32E (0.35 GPM/0.12 GPC)

AC POWER FAUCET T26T51A (0.5 GPM/0.09 GPC) T26T53A (0.5 GPM/0.19 GPC) T26T32A (0.35 GPM/0.12 GPĆ)



2







HELIX WALL-MOUNT


ECOPOWER FAUCET T26L51E (0.5 GPM/0.09 GPC) T26L53E (0.5 GPM/0.19 GPC) T26L32E (0.35 GPM/0.12 GPC) AC POWER FAUCE

T26L51A (0.5 GPM/0.09 GPC) T26L53A (0.5 GPM/0.19 GPC) T26L32A (0.35 GPM/0.12 GPĆ)











- Micro-sensor positioned underneath the spout head provides accurate hand detection and ensures smooth. consistent water distribution
- Vandal resistant nozzle
- Aerated flow
- Durable chrome plated spout body
- Kit includes spout body, controller box, and mounting hardware (supply lines not included)
- > 0.35 gpm aerated flow
- ▶ Contributes to earning LEED® credits
- Equipped with 0.35 gpm flow control. 0.12 gpc, 20 sec ondemand flow






- The choice of self-generating hydropowered ECOPOWER® system or AC system
- Micro-sensor positioned underneath the spout head provides accurate hand detection and ensures smooth, consistent water distribution
- Vandal resistant nozzle
- Aerated flow
- Durable chrome plated spout body
- Kit includes spout body, controller box, and mounting hardware (supply lines not included)
- > 0.35 gpm aerated flow
- Contributes to earning LEED®
- Equipped with 0.35 gpm flow control. 0.12 gpc, 20 sec ondemand flow





- The choice of self-generating hydropowered ECOPOWER® system or AC system
- Micro-sensor positioned underneath the spout head provides accurate hand detection and ensures smooth, consistent water distribution
- Vandal resistant nozzle
- Aerated flow
- Durable chrome plated spout body
- Kit includes spout body, controller box, and mounting hardware (supply lines not included)
- 0.35 gpm aerated flow
- Contributes to earning LEED® credits
- Equipped with 0.35 gpm flow control. 0.12 gpc, 20 sec ondemand flow





LIBELLA® SEMI-VESSEL

AC POWER FAUCET

ECOPOWER FAUCET
T23M51E (0.5 GPM/0.09 GPC)
T23M53E (0.5 GPM/0.19 GPC)
T23M32E (0.35 GPM/0.12 GPC)


T23M51A (0.5 GPM/0.09 GPC)

T23M53A (0.5 GPM/0.19 GPC)

🔞 🕭 🖎 CALGreen 👛 📰

T23M32A (0.35 GPM/0.12 GPĆ)

- The choice of self-generating hydropowered ECOPOWER® system or AC system
- Micro-sensor positioned underneath the spout head provides accurate hand detection and ensures smooth. consistent water distribution
- Vandal resistant nozzle
- Aerated flow
- Durable chrome plated spout body
- Kit includes spout body, controller box, and mounting hardware (supply lines not included)
- 0.35 gpm aerated flow
- Contributes to earning LEED® credits
- Equipped with 0.35 gpm flow control. 0.12 gpc, 20 sec ondemand flow







LIBELLA® WALL-MOUNT L

ECOPOWER FAUCET T23L51E (0.5 GPM/0.09 GPC) T23L53E (0.5 GPM/0.19 GPC) T23L32E (0.35 GPM/0.12 GPC) **AC POWER FAUCET**

T23L51A (0.5 GPM/0.09 GPC) 3L53A (0.5 GPM/0.19 GPC) .32A (0.35 GPM/0.12 GPĆ)








- The choice of self-generating hydropowered ECOPOWER® system or AC system
- Micro-sensor positioned underneath the spout head provides accurate hand detection and ensures smooth, consistent water distribution
- Vandal resistant nozzle
- Aerated flow
- Durable chrome plated spout bodv
- Kit includes spout body, controller box, and mounting hardware (supply lines not included)
- Equipped with 0.5 gpm flow control. 0.08 gpc, 10 sec ondemand flow

5/16" (7 mm)

11/16" (16 mm







STANDARD-R

ECOPOWER FAUCET T28S11E (1.0GPM/0.18 GPC) T28S5IE (1.05PM/0.18 GPC) T28S5IE (0.5 GPM/0.09 GPC) T28S53E (0.5 GPM/0.19 GPC) T28S32E (0.35 GPM/0.12 GPC) AC POWER FAUCET T28S11A (1.0GPM/0.18 GPC) T28S51A (0.5 GPM/0.09 GPC) T28S53A (0.5 GPM/0.19 GPC) T28S32A (0.35 GPM/0.12 GPĆ) AC FAUCET + EWATE T28S51S (0.5 GPM/0.09 GPC)





- The choice of self-generating hydropowered ECOPOWER® system or AC system
- Micro-sensor positioned underneath the spout head provides accurate hand detection and ensures smooth, consistent water distribution
- Vandal resistant nozzle
- Laminar flow
- Durable chrome plated spout bodv
- Kit includes spout body, controller box, and mounting hardware (supply lines not included)
- Equipped with 1.0 gpm flow control. 0.18 gpc, 10 sec ondemand flow
- AC FAUCET + EWATER Only applicable for 0.5gpm and AC type

STANDARD-S

ECOPOWER FAUCET T27S11E (1.0 GPM)

T27S1E (1.0 GF14) T27S51E (0.5 GPM/ 0.09 GPC) T27S53E (0.5 GPM/ 0.19 GPC) T27S32E (0.35 GPM/0.12 GPC) AC POWER FAUCET T27S11A (1.0 GPM)

T27S51A (0.5 GPM/ 0.09 GPC) T27S53A (0.5 GPM/ 0.19 GPC) T27S32A (0.35 GPM/0.12 GPC)






- The choice of self-generating hydropowered ECOPOWER® system or AC system
- Micro-sensor positioned underneath the spout head provides accurate hand detection and ensures smooth, consistent water distribution
- Vandal resistant nozzle
- Laminar flow
- Durable chrome plated spout body
- Kit includes spout body, controller box, and mounting hardware (supply lines not included)
- Equipped with 1.0 gpm flow control. 0.18 gpc, 10 sec ondemand flow

TOUCHLESS FAUCET CONTROLLER WITH HEATER **FAUCET CONTROLLER** RFAH03B1U




- ▶ INTEGRATED hot water system and TOUCHLESS Faucet Controller. (Integrated thermostatic mixing valve is ASSE 1070 compliant.)
- **ECOLOGICAL WITH POWER** SAVINGS / Find a time when hot water usage is low and save energy
- EASY TO INSTALL / Hot water piping system, T&P relief valve and expansion tank are NOT required
- ▶ EASY TO MAINTAIN / No periodical replacement parts
- SAFETY DESIGN / Tank and Heating element are made of high corrosion-resistance stainless steel
- ▶ EQUIPPED with burnout prevention control of heater elements
- COMPACT DESIGN / Allows for ADA compliance.
- For use with 0.5 gpm flow control, 0.08 gpc, 10 sec ondemand flow TOTO Touchless Faucet



AVAILABLE FINISH









TOUCHLESS

SOAP DISPENSER TES201AE (1 spout) TES202AE (2 spouts) TES203AE (3 spouts) **SOAP DISPENSER** WITH SUBTANK TES204AE (2 spouts) TES205AE (3 spouts)





TOUCHLESS

SOAP DISPENSER - SEMI-VESSEL TES201AF (1 spout) TES204AF (2 spouts) TES205AF (3 spouts) SOAP DISPENSER WITH SUBTANK TES204AF (2 spouts) TES205AF (3 spouts)



TOUCHLESS

SOAP DISPENSER - VESSEL TES201AG (2 spouts) TES202AG (3 spouts) TES203AG (4 spouts) **SOAP DISPENSER** WITH SUBTANK TES204AG (2 spouts) TES205AG (3 spouts)



TOUCHLESS

SOAP DISPENSER - ROUND TES201AB (1 spout) TES202AB (2 spouts) TES203AB (3 spouts) **SOAP DISPENSER - ROUND** WITH SUBTANK TES204AB (2 spouts) TES205AB (3 spouts)





TOUCHLESS SOAP DISPENSER - ROUND

VESSEL TES201AD (1 spout) TES202AD (2 spouts) TES203AD (3 spouts) **SOAP DISPENSER - ROUND VESSEL WITH SUBTANK** TES204AD (2 spouts) TES205AD (3 spouts)





SCAN CODE TO VIEW SOAP **DISPENSERS**

*Available 2021

TOTO® SOAP 1 GALLON PACKAGE OF 4, 1 GAL. EACH TSFG1

- New FDA compliant. eco-friendly Triclosan-free formulation
- Antibacterial soap effectively reduces up to 99.999% of bacteria during
- Mild lotion soap suitable for daily use
- Use with foaming soap dispenser to create a rich lather for effective hand cleansing and to reduce water consumption

TOTO SCENTED SOAP 1 GALLON PACKAGE OF 4, 1 GAL. EACH TSFB1-GS

- Green Seal™ GS-41 certified
- No triclosan
- Biodegradable
- · Helps qualify for LEED credits



- TOTO's IoT Soap Dispenser alerts your team when the dispenser needs to be refilled or if the controller is leaking
- Micro-sensor under the spout ensures accurate hand detection
- Auto-purge cycle prevents soap from clogging the spout

COMMERCIAL LAVATORIES

Innovation & Technology Highlights

TOTO lavatories deliver the ideal combination of design and functionality. Available in a variety of styles from undercounter to self-rimming, our lavatories offer comfortable use for everyone, regardless of age or physical ability. They're the perfect choice for any commercial space, from hotels to public facilities.







The Americans with Disabilities Act (ADA) was enacted in 1990 to establish design codes to serve people of all ages and abilities. A core principle behind TOTO Total Design, ADA standards consider the needs of everyone, no matter their needs, without additional adaptation or specialization, optimizing the bathroom experience for all generations.

VESSEL LAVATORIES OVERVIEW

ARVINA® RECTANGLE VESSEL LAVATORY LT415G



ARVINA RECTANGLE VESSEL LAVATORY LT425G

ARVINA RECTANGLE VESSEL LAVATORY LT426G

























- ▶ 19-11/16"W x 18-1/8"D x 2-3/4"H
- ► CEFIONTECT® ceramic glaze minimizes debris and mold from sticking to surface
- Inset faucet mount
- > Thin, rounded edges achieving a decorative design
- Installation template included
- ADA compliant
- Front overflow
- Drain and faucet sold separately

- > 23-5/8"W x 18-1/8"D x 2-3/4"H
- CEFIONTECT ceramic glaze minimizes debris and mold from sticking to surface
- Inset faucet mount
- Thin, rounded edges achieving a decorative design
- Installation template included
- ADA compliant
- Front overflow
- Drain and faucet sold separately


- 19-11/16"W x 14-15/16"D x 2-3/4"H
- CEFIONTECT ceramic glaze minimizes debris and mold from sticking to surface
- Thin, rounded edges achieving a decorative design
- Installation template included
- ADA compliant
- ▶ Front overflow
- Drain sold separately


- > 23-5/8"W x 14-15/16"D x 2-3/4"H
- ▶ CEFIONTECT ceramic glaze minimizes debris and mold from sticking to surface
- Thin, rounded edges achieving a decorative design
- Installation template included
- ADA compliant
- Front overflow
- Drain sold separately
























VESSEL LAVATORIES CONTINUED

ARVINA® ROUND VESSEL LAVATORY LT573

ARVINA SQUARE VESSEL LAVATORY LT574



OVERVIEW

UNDERCOUNTER LAVATORY










UNDERCOUNTER LAVATORIES

















- » ø16-9/16" Dia. x 4-15/16" H
- Without overflow
- Vitreous china
- ADA compliant
- Complete with installation template
- Drain sold separately
- ▶ 16-9/16" W x 16-9/16" D x 4-15/16" H
- Without overflow
- Fireclay
- ADA compliant
- Complete with installation template
- Drain sold separately

- ▶ 17" x 14"
- Oval Undercounter Lavatory
- ▶ ADA compliant
- Vitreous china
- Concealed front overflow
- Mounting assembly complete with installation template, mounting screw set
- ▶ 19" x 15"
- **Oval Undercounter Lavatory**
- ADA compliant
- Vitreous china
- Concealed front overflow
- Mounting assembly complete with installation template, mounting screw set























RENDEZVOUS UNDERCOUNTER LAVATORY LT579(G)

DANTESCA UNDERCOUNTER LAVATORY LT597(G)

ATHERTON UNDERCOUNTER LAVATORY LT233










- ▶ 17"x 14"
- Oval Undercounter Lavatory
- Optional CEFIONTECT ceramic glaze
- ADA compliant
- Vitreous china
- Mounting assembly complete with installation template and mounting screw set
- ▶ Front overflow


- ▶ 19"x 15"
- Oval Undercounter Lavatory
- Optional CEFIONTECT ceramic glaze
- ▶ ADA compliant
- Vitreous china
- Mounting assembly complete with installation template and mounting screw set
- ▶ Front overflow


▶ 19"x 15"


Ġ.


- Oval Undercounter Lavatory
- ADA compliant
- Vitreous china
- Mounting assembly complete with installation template and mounting screw set
- ▶ Front overflow
- Available in cotton (#01) only














UNDERCOUNTER LAVATORIES OVERVIEW CONTINUED

UNDERCOUNTER **LAVATORY** LT1506G

ATHERTON UNDERCOUNTER LAVATORY LT221

UNDERCOUNTER **LAVATORY** LT156

RECTANGLE UNDERCOUNTER LAVATORY LT540G




















- ▶ 20-7/8" x 13"
- Oval Undercounter Lavatory
- CEFIONTECT ceramic glaze
- ADA compliant
- Vitreous china
- Mounting assembly complete with installation template and mounting screw set
- Front overflow
- Available in cotton (#01) only


- ▶ 17"x 13"
- Rectangular Undercounter Lavatory
- ADA compliant
- Vitreous china
- Mounting assembly complete with installation template and mounting screw set
- Front overflow
- Available in cotton (#01) only


- ▶ 19-3/4" x 13"
- Rear overflow
- Fired clay
- Mounting assembly complete with installation template and mounting screw set
- Available in cotton (#01) only
- 21-1/4"x 14-3/8"
- CEFIONTECT® ceramic glaze
- ADA compliant
- Front overflow
- Mounting assembly complete with installation template and mounting screw set
- Available in cotton (#01) and sedona beige (#12) only





























RECTANGLE UNDERCOUNTER LAVATORY LT542G

RECTANGLE UNDERCOUNTER LAVATORY LT191(G)

RECTANGLE UNDERCOUNTER LAVATORY LT1535G
















- ▶ 19"x 12-3/8"
- ▶ CEFIONTECT ceramic glaze
- ADA compliant
- ▶ Front overflow
- Mounting assembly complete with installation template and mounting screw set
- Available in cotton (#01) and sedona beige (#12) only


- > 20-1/2" x 12-3/8"
- Optional CEFIONTECT ceramic glaze
- ADA compliant
- Rear overflow
- Vitreous china
- Mounting assembly complete with installation template and mounting screw set
- ▶ 17-11/16" x 13"
- ▶ CEFIONTECT ceramic glaze
- ADA compliant
- Front overflow
- Vitreous china
- Mounting assembly complete with installation template and mounting screw set
- Available in cotton (#01) only
















WHEELCHAIR USER'S **LAVATORIES OVERVIEW**

WALL-HUNG LAVATORY LT307

UNDERCOUNTER LAVATORY LT308











- ▶ 21" x 18-1/4" lavatory with back splash
- ▶ ADA compliant
- Vitreous china
- Punching for concealed arm carrier
- Wall support concealed arms not supplied by TOTO
- Includes wall hanger
- Soap dispenser hole optional
- Faucet and soap dispenser not included





- ▶ 20-1/2" x 27"
- ▶ ADA compliant
- Vitreous china
- Punching for concealed arm carrier
- Wall support concealed arms not supplied by TOTO
- No hardware included
- Faucet not included







CLEAN DRY® HAND DRYERS

Innovation & Technology Highlights

TOTO's Clean Dry hand dryers offer high-speed air for an effective, economical solution. Infrared sensor-operated, Clean Dry offers innovative air wicking technology that dries the user's hands in under 12 seconds.






TOTO COMMERCIAL PERFORMANCE

Clean Dry hand dryers reduce energy use by 25 percent over traditional electronic hand dryers that sometimes fail to dry hands completely. Further, Clean Dry dryers are extremely quiet during operation with a low decibel rating between 55 and 62 dB

DECIBEL RATING



TOTO HAND DRYER BENEFITS

- Unobtrusive designs that blend into any bathroom décor
- Environmentally friendly no paper waste
- Eliminates the cost of providing paper towels, including the man-power needed to restock paper and discard trash
- Double-sided fan simultaneously dries hands from both sides, greatly reducing drying time*
- Washable trays to eliminate water splashing and prevent slip and fall accidents
- Vandal resistant designs

TOTO HAND DRYERS HELP THE ENVIRONMENT



^{*}Function available on specific models.

COMMERCIAL HAND DRYERS OVERVIEW

CLEAN DRY® HIGH SPEED HAND DRYER HDR130#SV CLEAN DRY HIGH SPEED HAND DRYER HDR101#WH CLEAN DRY HIGH SPEED HAND DRYER HDR111#SS CLEAN DRY HIGH SPEED HAND DRYER HDR120#WH















- ▶ High speed hand dryer
- ▶ Hygienic, touch-free operation
- Durable aluminium construction
- ▶ Low Operating noise 55dB(A)
- ▶ Energy Efficient 390 watts
- AC powered
- Available in silver (#SV)


- High speed hand dryer
- Hygienic, touch-free operation
- Splash resistant
- Water tray to prevent slip and fall
- Space saving, compact design
- ▶ Low Operating noise 57dB(A)
- ▶ Energy Efficient 390 watts
- AC powered
- Available in white (#WH)


- High speed hand dryer
- ▶ Hygienic, touch-free operation
- Splash resistant
- Space saving, in-wall design
- Vandal proof water tray
- Low Operating noise 56dB(A)
- Energy Efficient 390 watts
- AC powered
- Stainless Steel Cover
- ▶ Flush mount
- ADA compliant
- Available in stainless steel (#SS)

- Hygienic sensor-activated hand dryer
- Double-sided blowers for faster dry time
- Sleek and compact design
- > 208 mph of air speed
- Side panels and water tray to prevent water from trickling to the floor
- Low operating noise 57dB(A)
- Energy efficient
- Available in white (#WH)

















WHAT IS THE KOLO™ SMART MONITORING SYSTEM—AND HOW DOES IT MAKE CONNECTED RESTROOMS POSSIBLE?

TOTO's innovative fixtures join GP PRO's proprietary sensors and KOLO communication technology with industry-leading reliability of enMotion and Compact dispensers.



YOUR ONE-STOP PLATFORM FOR CONNECTING SMART RESTROOMS



Data transmitted from GP PRO dispensers, TOTO fixtures, and third-party devices to collectors.



Data securely uploaded to the internet via wireless communication



Data stored and inalyzed in the cloud




Data sent to
easy-to-use KOLO™
mobile and desktop
applications



Open architecture enables KOLO™ data to be seamlessly integrated into third-party applications



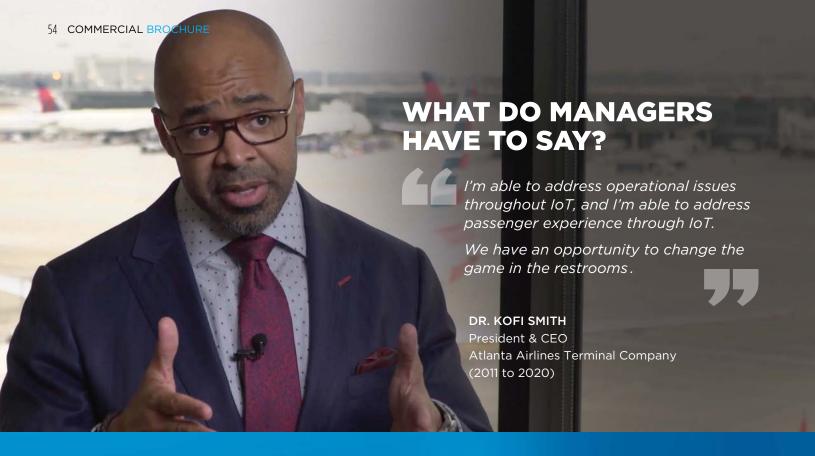

ENHANCE FACILITIES MANAGER EXPERIENCE

Receive real-time notification of restroom issues directly from the KOLO™ Clean App that help staff. The results? Save maintanence time and money while ensuring maximum cleanliness.



PREVENTATIVE MAINTENANCE

Quality improvement of maintenance, accessible through dashboard, report of actual usage and load information



INSTANTLY DETECT FAILURES

Promptly identify and address outages

STREAMLINE CUSTODIAN AND STAFF EXPERIENCE

Leverage data and reports to better manage your restrooms to insure safety and smooth facility operation with the $KOLO^{TM}$ Central Dashboard:



OPTIMIZE YOUR CLEANING CYCLE

Volume based cleaning Work force management Air care management




IMPROVE HYGIENE

Alert staff to check the stall Required assistance




ADVANCED USAGE ANALYTICS

Usage heat-map, labor and space optimization, and future Improvements

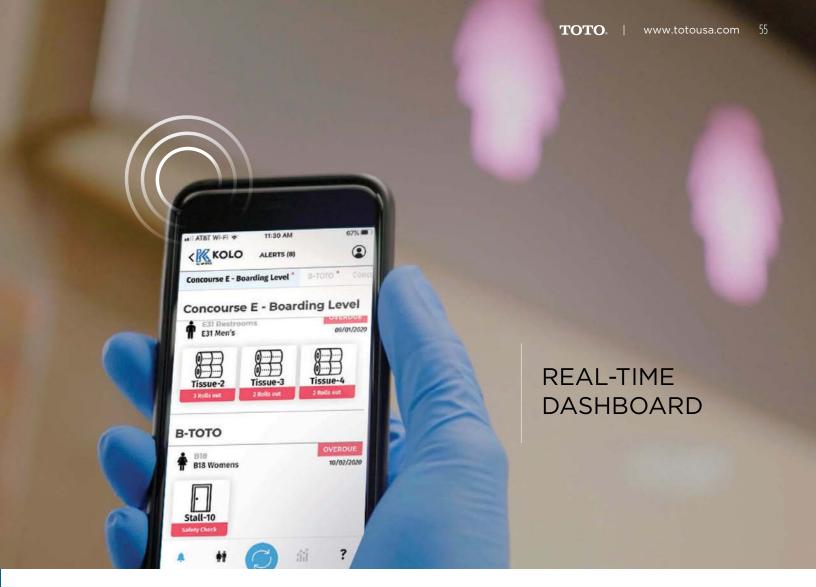






DASHBOARD

TOTO's IoT Smart Restroom provides a holistic solution for the entire restroom, giving your the ability to remotely manage your facility and fixtures in real-time.

IMPROVE OPERATIONS. **ENHANCE RESTROOM EXPERIENCE.**

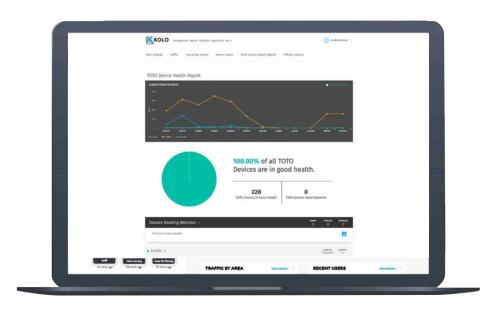

SYSTEM HEALTH

No matter if you are in a different terminal or at home. you can leverage the connected dashboard to check your system's health, what fixtures need attention, and direct your team to reduce down time.

Facilities managers can now leverage data collected from our TOTO fixtures and our Hand Washing Score* helping you decide where to influence new hand washing behaviors to keep your staff and customers safe.

ANALYTICS

Get powerful data and analytics at your fingertips. TOTO's powerful fixtures, combined with IoT driven data empowers you to act on real-time analytics to help improve maintenance and hygiene — saving time and increasing customer satisfaction.

Finally, with TOTO's IoT Smart Restroom, you will fully understand the use of space for future design and plumbing infrastructure improvements.

^{*}Have the ability to create a Customized Hand Washing Score Report



ECOPOWER FLUSH VALVES

This self-powered hydroelectric flush value system generates its own power through turning an internal turbine during every flush. With eco power flush valves, you can rest assured your plumbing fixtures will work -- even during a power outage.





URINAL FLUSH VALVE

COMPA	TIBIL	ITY
CHART		


CHART		FLUSHOMETER						
			ECOPOWER®		MANUAL			
	PRODUCT	SKU#		0.125 GPF	0.5 GPF	1.0 GPF	0.5 GPF	1.0 GPF
URINAL	Full Size Top Spud	UT445U	Exposed	TEU1UA12i2#CP				
	Full Size Back Spud	UT445UV	Concealed	TEU2UA11i2#SS				
				TEU3UA11i2#SS				
	Compact Top Spud	UT105U(G)	Exposed	TEU1UA12i2#CP				
	Compact Back Spud	UT105UV(G)	Concealed	TEU2UA11i2#SS				
				TEU3UA11i2#SS				
	Full Size Top Spud	UT447E	Exposed		TEU1LA12i2#CP	TEU1GA12i2#CP	TMU1LN12i2#CP	TMU1NNC-12i2
							TMU1LN22i2#CP	TMU1NNC-22i2
	Full Size Back Spud	UT447EV	Concealed		TEU2LA11i2#SS			
					TEU3LA11i2#SS			
	Compact Top Spud	UT104E	Exposed		TEU1LA12i2#CP	TEU1GA12i2#CP	TMU1LN12i2#CP	TMU1NNC-12i2
							TMU1LN22i2#CP	TMU1NNC-22i2
	Compact Back Spud		Concealed		TEU2LA11i2#SS			
					TEU3LA11i2#SS			



TOUCHLESS FAUCETS







- No minimum daily usage required
- · Reduced electricity
- Lower maintenance costs
- Better ecology
- Hands-free, automatic-shut-off



SCAN CODE TO VIEW ECOPOWER FAUCETS

Consult your TOTO Representative for more information concerning IoT Faucets

TOTO NOTES

SCAN CODE NOW

FOR DIGITAL COMMERCIAL BROCHURE



CATALOG.TOTOUSA.COM

TOTO USA, INC.

1155 SOUTHERN ROAD MORROW, GA 30260 800-350-8686

www.totousa.com www.washlet.com

#KO-032023-CB Printed in the U.S.A. 03/23